


# Secondary Telephone Alarm and Signal Unit TWIN LED

Optical and acoustic call signalling

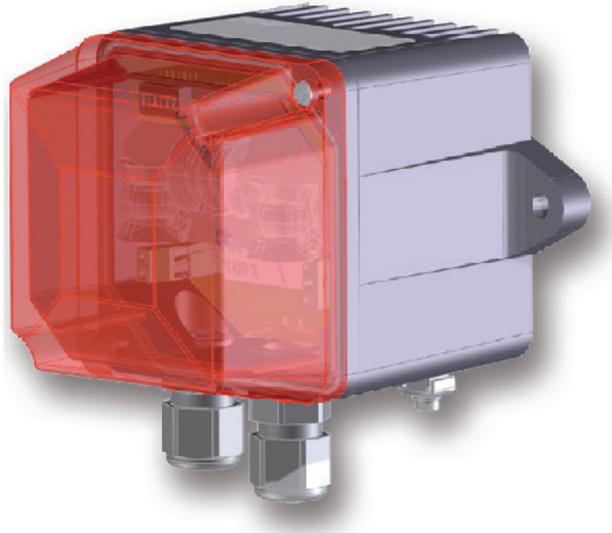

## Overview

The optical and acoustic secondary alarm and signal unit is designed for application in industrial areas and is suitable for indoor and outdoor use.

The TWIN LED is a device suitable for connection to analogue public telephone networks and private branch exchanges.

When receiving a call signal to the respective telephone connection, the device submits optical and acoustic signals.

The signal light is available in 5 different cap colours.

## Features

- Protection class IP 66
- Robust housing made of aluminium
- Very bright LED technique
- Extremely long life-cycle
- 4 loud melodies selectable
- Volume approx. 100 dB(A)

The TWIN LED is a compact unit comprising power supply, telephone connection, strobe light, amplifier and loudspeaker. The bottom box is made of seawater-resistant cast aluminium coated with plastic. The loudspeaker is permanently mounted to the housing. The strobe light cap forms the housing cover and is made of polycarbonate.

## Technical data

Operating modes	
<b>Secondary Telephone Alarm and Signal unit</b>	Selectable via slide-switch
<b>Secondary telephone alarm</b>	Signalling is performed when call from analogue telephone network arrives. A present power supply is required.
<b>Signal unit</b>	Signalling is performed at activation of power supply
<b>Cable glands</b>	2x M20 x 1.5 for lines $\varnothing$ 6-13 mm
<b>Terminal capacity</b>	0.2-2.5 mm <sup>2</sup> stranded wire 0.2-4.0 mm <sup>2</sup> massive
Power supply	
<b>Terminal designation</b>	For AC supply: L, N, PE, additionally PA outside For DC supply: V+, V-, PA outside
<b>Voltage supply AC</b>	Oversvoltage category CAT II (according to EN60664-1) $U_N = 115 V_{AC}$ to $230 V_{AC}/f = 50$ Hz to 60 Hz Minimum admissible voltage = 100 VAC Maximum admissible voltage = 253 VAC
<b>Voltage supply DC</b>	$24 V_{DC} +10/-20$ % Minimum admissible voltage = $19,2 V_{DC}$ Maximum admissible voltage = $26,4 V_{DC}$
<b>Operating time</b>	Suitable for continuous operation
Telephone connection	
<b>Terminal designation</b>	TCP1, TCP2
<b>AC ringing voltage</b>	$24 V_{AC} \dots 100 V_{AC}$
<b>Overlaid supply voltage</b>	$\leq 66 V_{DC}$
<b>Ringing frequency</b>	20 Hz ... 68 Hz
<b>Input impedance at 25 Hz</b>	$Z \geq 16 k\Omega @ 30 \dots 70 VZ$
<b>Input impedance at 50 Hz</b>	$Z \geq 8 k\Omega @ 30 \dots 70 V$
Acoustic signalling	
<b>Acoustic signal</b>	8 different settings (selectable via slide-switch)
<b>Volume setting</b>	4 loud melodies selectable 4 lower melodies selectable
<b>Maximum volume</b>	Approx. 101 dB(A) in 1 m distance
<b>Minimum volume</b>	Approx. 91 dB(A) in 1 m distance
Optical signalling	
<b>Optical signalling unit</b>	3 LEDs
<b>Colour selection</b>	Coloured cap, coloured LED
<b>Flashing interval</b>	80 ms
<b>Flash frequency</b>	1 Hz
<b>Signalling interval after ringing (bridging of calling pause)</b>	Approx. 4 s
Housing	
	die-cast Aluminium, surface powder-coated
<b>Weight</b>	Approx. 1.7 kg
<b>Operating position</b>	Any

## Technical data



Environmental conditions	
<b>Operating temperature</b>	-40 °C bis +65 °C
<b>Transport and storage temperature</b>	-40 °C to +85 °C according to IEC60721
<b>Protection class</b>	IP 66 according to EN 60529
<b>Category</b>	I (PE connection available)
Anschlussplan	
<b>Telephone network</b>	Connect polarity-independent in parallel to telephone (TCP1, TCP2)
<b>Supply network</b>	Observe the polarity in DC networks. In AC networks, the outer conductor should be connected to L, the neutral conductor to N and the protective conductor to PE
<b>Potential equalization</b>	Must be connected in all models, even in case of DC supply. The connector is situated on the outside of the housing.

## Ordering data

\* The full article number is made up by appending the colour code to the article numbers given below.

Type	Designation	Model	Current consumption	Article number*
TWIN LED	Secondary Alarm and Signal Unit	100 to 253 V <sub>AC</sub>	0,08 A/0,04 A	FHF 118 827 ..
TWIN LED	Secondary Alarm and Signal Unit	24 V <sub>DC</sub>	0,15 A	FHF 118 823 ..

## General arrangement drawing (all dimensions in mm)

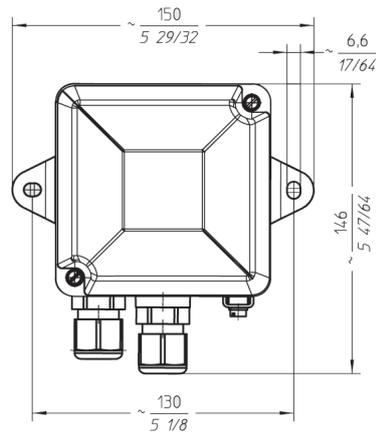

transparent	01
red	02
amber	03
green	04
blue	05

FHF Funke + Huster Fernsig GmbH  
Gewerbeallee 15-19  
D-45478 Mülheim an der Ruhr  
Telefon +49-208-82 68-0  
Telefax +49-208-82 68-286  
<http://www.fhf.de>  
e-mail: [info@fhf.de](mailto:info@fhf.de)

© 2019 Eaton  
All rights reserved  
Publication No. DSFH0087/A  
June 2019

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

