

## Series AV05 Accessories

### Blanking plate

- ▶ Base plate principle, multiple ▶ Reversed pressure supply permissible ▶ With collective pilot air exhaust
- ▶ for AV05



23144

Ambient temperature min./max.	-10°C / +60°C
Medium temperature min./max.	-10°C / +60°C
Medium	Compressed air
Max. particle size	40 µm
Oil content of compressed air	0 mg/m³ - 5 mg/m³
Working pressure min./max.	-0.9 bar / 10 bar
Protection class	IP65
Mounting screw	Hexalobular socket (TORX) ISO 10664-8
Tightening torque for mounting screws	0.5 Nm±0,1

**Materials:**

Base plate	Polyamide, fiber-glass reinforced
Seals	Nitrile rubber
Screws	Steel, galvanized



#### Technical Remarks

- The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of compressed air must remain constant during the life cycle.
- Use only the approved oils from AVENTICS, see chapter „Technical information“.

Delivery quantity	Weight	Part No.
	[kg]	
1	0.03	<b>R422102526</b>
Delivery includes sealing kit and 1x mounting screw		

**Series AV05**  
Accessories

Dimensions

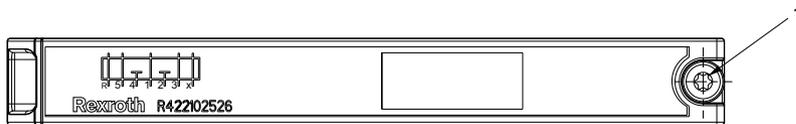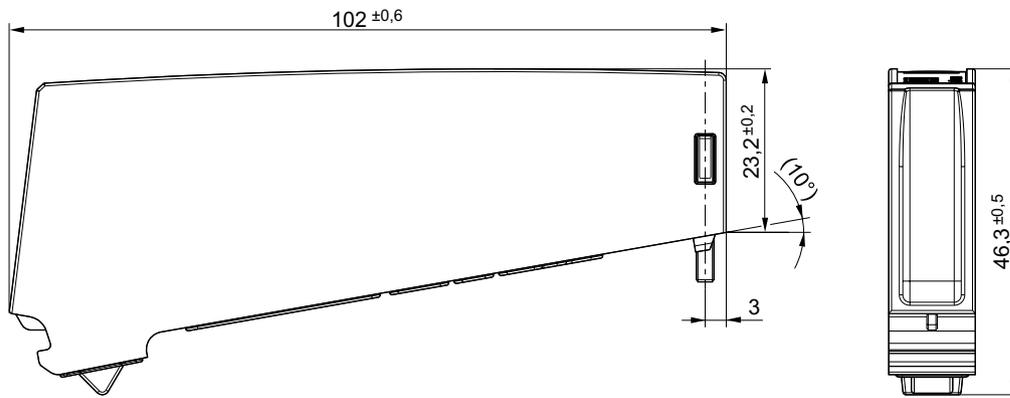

1) Mounting screw

23041