



Short Stroke Cylinder Series 2700

Accessories

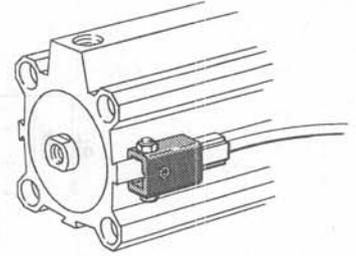

▲ Sensor mounting for series 275

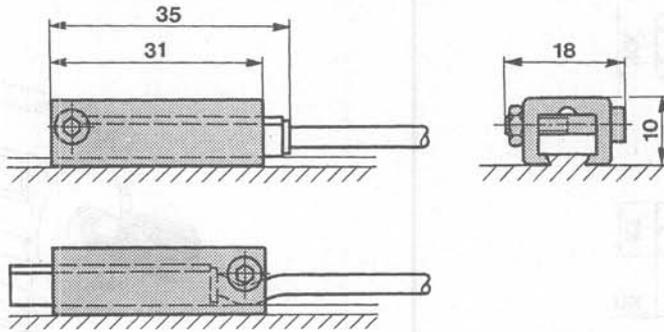

Alternative position of sensor.



Piston dia. 12-100	Code no. 275 211 200 0
------------------------------	----------------------------------

Materials: Anodized aluminium, screw and nut stainless steel (BS 303 S 31).

Technical Data Outlet	PNP	Reed
Voltage and type of current	DC 10-30 V	AC/DC 3-30 V
Max. continuous current	250 mA	300 mA
Voltage drop	≤0,6 V	3,5 V
Leakage current	10 μA	-
Internal consumption	5-20 mA	-
Ambient temperature range	-20° C to +70° C	-40° C to +85° C
Protection	IP 67 as per IEC 529	IP 67 to IEC 529

Material: Polyamide, cable PVC.

▲ Sensor with encapsulated cable



* LED

Code No.	Symbol	Type	Code no.	Cable length L [m]
		PNP	322 300 310 0	3
		Reed	322 320 310 0	3

1. Brown 2. Blue 3. Black 4. Load