



VOC Sensor

p-type Metal Oxide



Technical Specification

This sensor is a broadband total VOC detector. When the cost of a PID is not justifiable, this sensor will detect VOCs with 10-50 ppb limit of detection, depending on the VOC.

Unlike common n-type sensors, this metal oxide sensor has a large dynamic range, repeatable response, low humidity response and resistance increases in the presence of most VOCs.

The change in resistance can be converted to an output voltage via a simple electrical circuit. Although the sensor can be used in constant temperature/ voltage mode, best response is achieved when the sensor is cycled between 400°C (sensing temperature) and 525°C (reset temperature). See our Application Note.


PERFORMANCE

Range	ppm isobutylene limit of performance warranty	1 to 100
Sensor resistance (R_o)	k Ω (50% rh, 23 \pm 2°C)	220 \pm 45
Sensor resistance ratio ($R_g/R_o \times 100\%$)	%; Isobutylene @ 10ppm in air	285 \pm 30
Gas response relationship ($R_g/R_o - 1 = \sum k_i \times \text{Conc}^n$)		0.5 +/- 10% (k for isobutylene)
where k_i = constant for gas i, n = 1 or 0.5		0.5 (n for isobutylene)
Heater resistance (R_H @ RT)	Ω (23 \pm 1°C)	10 \pm 1.5
Heater resistance (R_H @ sensing temp.)	Ω (400 \pm 10°C)	22 \pm 3
Heater resistance (R_H @ reset temp.)	Ω (525 \pm 10°C)	26 \pm 3
Heater power consumption (mW) typical for 5:1	$V_H = 2.7 \pm 0.2V$ (400°C)	340 \pm 30
	$3.7 \pm 0.3V$ (525°C)	530 \pm 50
Operating Temperature Range	°C	-20 to 120

SENSITIVITY TO OTHER GASES

EtOH response	% measured gas @ 10 ppm EtOH	TBA
C ₃ H ₈ response	% measured gas @ 500 ppm C ₃ H ₈	TBA

Figure 1 Response from 0 to 20ppm Isobutylene

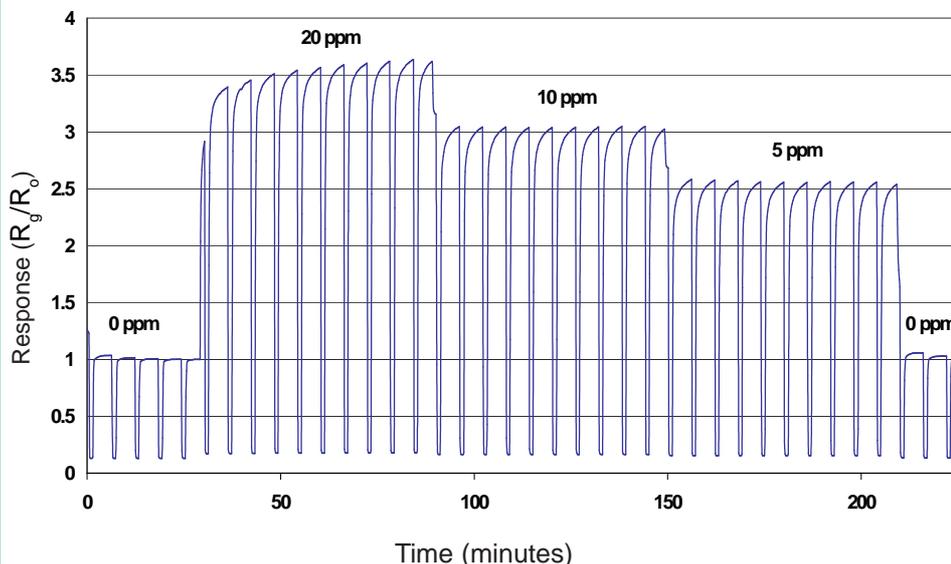

Real time response at 20,10 and 5 ppm Isobutylene in 50% rh. Sensor operating in 2-temperature mode, pulsing between 400°C for 5 mins and 525°C for 1 min.



VOC Sensor


p-type Metal Oxide

Performance Data




Technical Specification

Figure 2 Response from 0 to 100ppm Ethanol

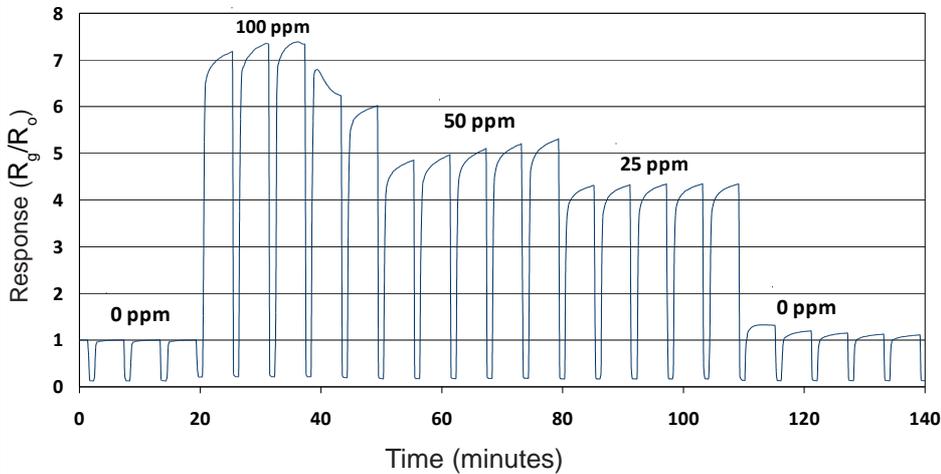


Real time response to 100, 50 and 25 ppm Ethanol in 50% rh. Sensor operating in 2-temperature mode, pulsing between 400°C for 5 mins and 525°C for 1 min.

Figure 3 Response from 0 to 500ppb Benzene

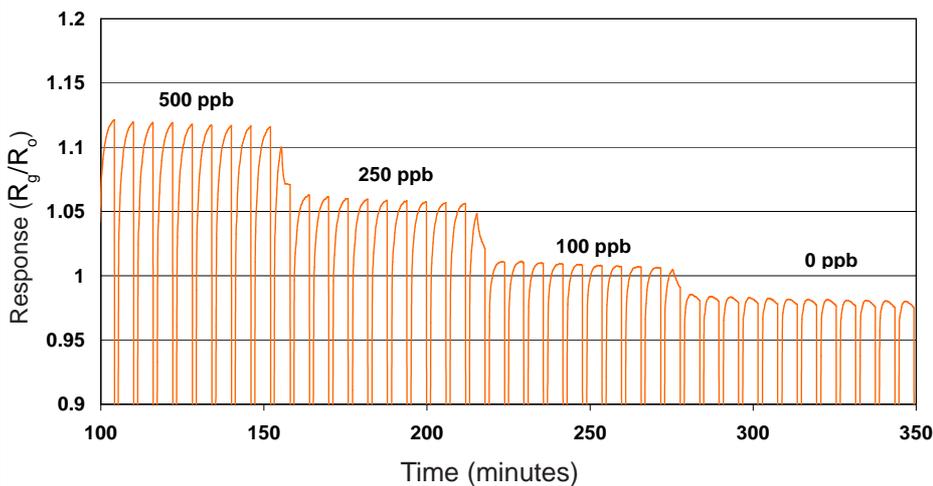

Real time response to 500, 250 and 100ppb Benzene in 50% rh. Sensor operating in 2-temperature mode, pulsing between 400°C for 5 mins and 525°C for 1 min.

Figure 4 Response from 10% to 90% rh at 23°C

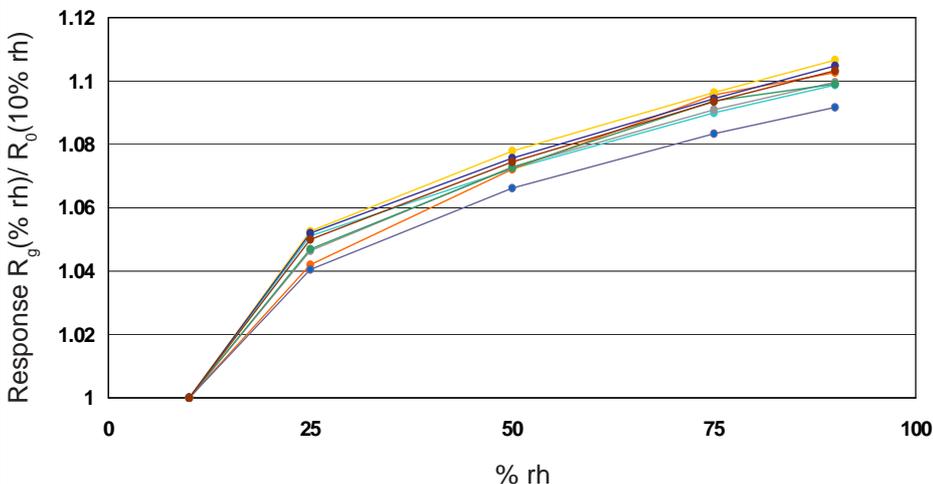

Response over a range of 10% - 90% rh air, operating in 2-temperature mode with a 5:1 cycle ratio of sensing (400°C) and resetting (525°C)

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (©ALPHASENSE LTD) Doc. Ref. MMO-VOC/APR17