


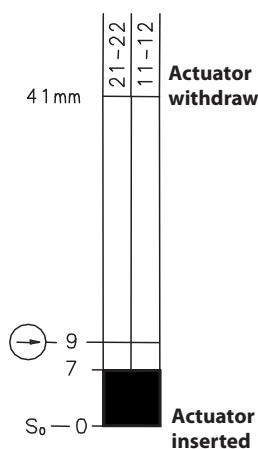
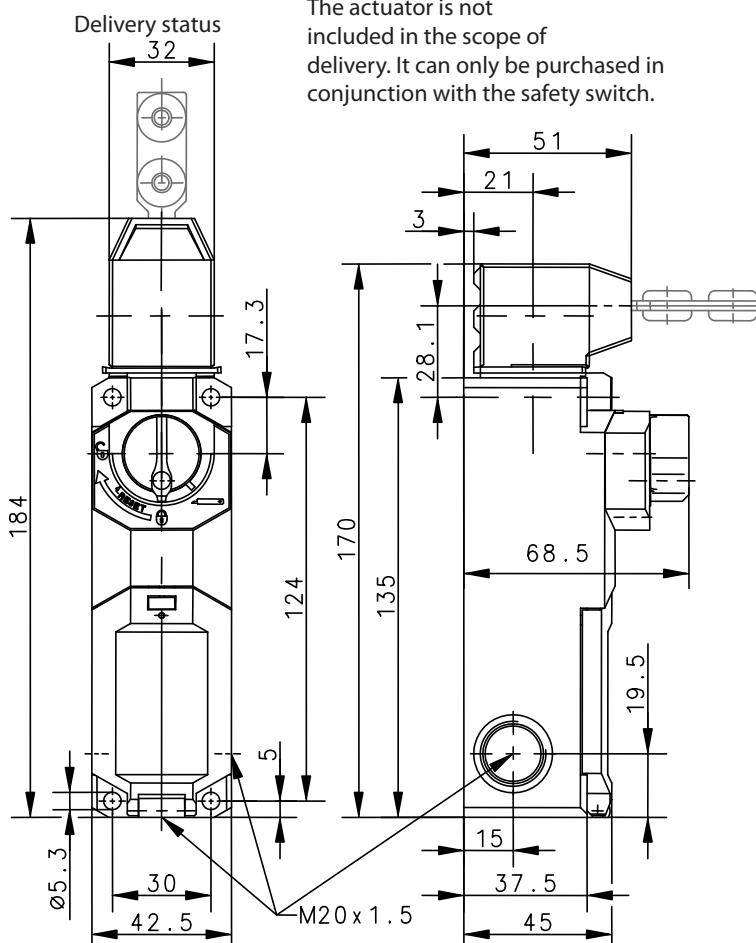


Safety switch

Series SLK – with separate actuator

Description **SLK-F-UC-22-R2-A0-L0-0**Article number **6118169117**
**Position monitoring
of guard locking
(not wired)**

**Termination electromagnet
with contact position
E1, E2 without current**

E1, E2 with current
**Operating diagram**

The actuator is not included in the scope of delivery. It can only be purchased in conjunction with the safety switch.





Electrical data		
Protection class		II, totally insulated
Contact elements		
Rated insulation voltage	U_i	250 V
Rated impulse withstand voltage	U_{imp}	2,5 kV
Conv. thermal current	I_{the}	5 A
Utilization category		AC-15, U_e / I_e 230 V / 2,5 A
Direct opening action	\oplus	according to IEC/EN 60947-5-1, Annex K
Short-circuit protective device		4 A gG
Electro magnets		
Duty cycle		100 % ED (at E1; E2)
Temperature class		F (155 °C)
Inrush power consumption		12 VA (0,2 s)
Permanent power consumption		4,4 VA
Switch operations permanent		600 / h
Operating voltage		24 V AC / DC

Mechanical data		
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)	
Cover	Thermoplastic, glass fibre reinforced (UL 94-V0)	
Actuating head	Thermoplastic, glass fibre reinforced / Zn-GD	
Actuator	Separate actuator (Steel / PA)	
Minimum actuating radius	R_{min}	see separate actuators data sheet
Velocity for actuating	V_{max}	0,5 m/s
Extraction force		≥ 27 N
Interlocking principle	Spring force	
Unlocking	a) magnetic force b) emergency release from the front	
Hold on force	F_{zh}	≤ 1500 N acc. to GS-ET-19
Ambient air temperature		-25 °C ... +70 °C
Contact type	4 NC	
Switching principle	4 slow make and break contact elements	
Mechanical life	1 x 10 ⁶ switching cycles (at max. 600 switch operations / h)	
Assembly	4 x M5	
Connection	Spring-clamp connection	
Conductor cross-sections	0,5 ... 1,5 mm ² flexible	
Cable entrance	3 x M20 x 1,5	
Weight	≈ 0,36 kg	
Installation position	operator definable	
Protection type	IP67 acc. to IEC/EN 60529	

ID for safety engineering		
B10d	2 x 10 ⁶ cycles	

Anfahrmöglichkeiten		
4 different actuating directions achievable by rotating the actuating head. Changing between horizontal and vertical actuating direction by setting the actuating head in the requested direction.		

**Standards**

VDE 0660 T100, DIN EN 60947-1, IEC 60947-1

VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1

GS-ET-19

DIN EN ISO 13849-1

EU Conformity

acc. to directive 2006/42/EC (Safety-of-Machinery-Directive)

Approvals

DGUV

cCSA_{us} B300 (same polarity)

CCC

Notes

The degree of protection (IP code) specified applies solely to a properly closed cover and the use of an equivalent cable gland with adequate cable.

The switch may not be used as a mechanical stop.

When power is removed from the electromagnet (solenoid) the safety guard will be in locked position.

The emergency release function is activated by rotating the rotary handle 90° clockwise. The supplied key is necessary to reset the emergency release function.