



IONPURE® VNX HIGH FLOW CONTINUOUS ELECTRODEIONIZATION (CEDI) MODULES

IONPURE VNX MODULE — VNX50-3


The VNX module is designed with proven continuous electrodeionization (CEDI) technology to produce high purity water. Proprietary flexmount connectors create a support system for the modules, which eliminates the need for a skid, simplifies the system design and reduces costs.

Each VNX industrial module has a nominal flow rate of 50.0 gpm (11.4 m³/hr). Multiple 50 gpm modules provide for system designs with flow rates up to, and greater than 1,000 gpm.

VNX Series Features

- Generates mixed bed deionized water without the use of chemicals
- No need for acid/caustic, neutralization system or exchangeable DI tanks
- Consistent continuous production instead of batch cycle variability
- Most compact footprint in the industry
- Can be operated in both horizontal and vertical configuration
- Significantly lower operating costs than conventional ion exchange
- Robust leak free sealing with through-port gasket
- Large flow modules reduce system cost and simplify skid design
- Connection fittings are included
- On-board junction box

For additional information on our VNX50 series call +1 866.876.3340 or visit our website at www.ionpure.com.

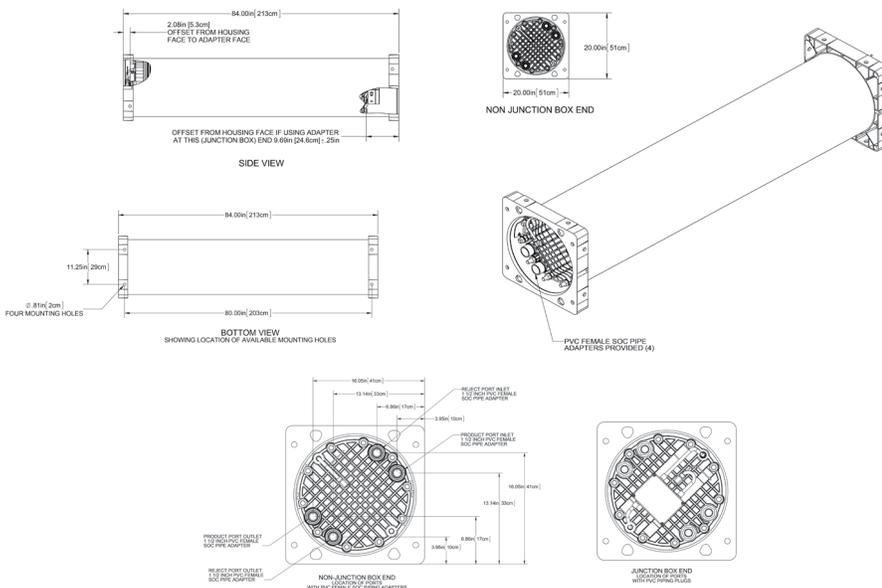

OPERATING ENVIRONMENT

Installation should be indoors with no direct sunlight and should have a maximum ambient room temperature of 113°F (45°C).

MATERIAL CONSTRUCTION

- Wetted components of the VNX module consist of: PVC, polyphenylene oxide, polypropylene, silicone, ion-selective membranes, ion exchange resins and thermoplastic elastomer.
- Housing is fiberglass reinforced plastic (FRP). Standard color is white with a glossy finish. Custom colors and labeling are available.
- The proprietary Flexmount™ bracket/end-block assembly is an epoxy painted aluminum casting suitable for securing modules to the frames and/or each other in Ionpure® system approved configurations.

QUALITY ASSURANCE STANDARDS

CE marked. Each module is factory tested to meet strict industry standards and is manufactured in an ISO 9001 and ISO 14000 quality and environmental management system.

ORDERING INFORMATION

- Use model number IP-VNX50-3 when ordering for vertical or horizontal installation.
- Each VNX module has four process connections; feed, concentrate feed, product and reject. PVC adapters (with dust covers) and plugs are provided with the module. High purity 50mm polypropylene adapters are also available.
- Module electrical power connections are made through an on-board junction box.

PHYSICAL SPECIFICATIONS

Diameter	Width	Height	Length	Shipping Weight	Operating Weight
17.5" (44.45 cm)	20.0" (50.8 cm)	20.0" (50.8 cm)	84.0" (213.3 cm)	610 lbs (276.7 kg)	825 lbs (374.2 kg)

Maximum Feed Water Specifications

Feed Water Conductivity Equivalent, including CO ₂ and Silica	< 40 µS/cm
Feed Water Source	RO permeate
Temperature	40 - 113°F (5 - 45°C)
Inlet Pressure	20 - 100 psi (1.4 - 7 bar)
Maximum Total Chlorine (as Cl ₂)	< 0.02 ppm
Iron (as Fe)	< 0.01 ppm
Manganese (as Mn)	< 0.01 ppm
Sulfide (S ⁻)	< 0.01 ppm
pH	4 - 11
Total Hardness (as CaCO ₃)	< 1.0 ppm
Dissolved Organics (TOC as C)	< 0.5 ppm
Silica (SiO ₂)	< 1.0 ppm

Typical Module Performance

Operating Parameters

Recovery	90 - 95%
Flow Rate: Minimum	25.0 gpm (5.7 m ³ /hr)
Flow Rate: Nominal	50 gpm (11.4 m ³ /hr)
Flow Rate: Maximum	75 gpm (17.0 m ³ /hr)
DC Voltage	0 - 600
DC Amperage	0 - 13.2

Product Water Quality

Product Resistivity	> 16 megohm-cm*
Silica (SiO ₂) Removal	90 - 99%, depending on feed conditions

*Actual performance may be determined using the IP-Pro projection software available from Ionpure.



4800 North Point Parkway, Suite 250, Alpharetta, GA 30022

+1 (866) 926-8420 (toll-free)

+1 (978) 614-7111 (toll)

www.ionpure.com

Ionpure and Flexmount are trademarks of Evoqua, its subsidiaries or affiliates, in some countries.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2014 Evoqua Water Technologies LLC Subject to change without notice ION-VNX503-DS-0514