

IN991197

Inductive sensors • Increased ambient temperature

sensor inductive, M32x1.5 91long, Non-flush, Sn: 13, -25-230°C, Anschluss an Verstärker, Lemo-connector, IP50, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of electrical connection	Lemo plug connector
Relative hysteresis	20%
Switching distance	13mm
Switching frequency	200Hz
Connection to amplifier	Yes

Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1.5mm
Cable infeed	axial
Length	91mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP50
Active area material of sensor	Plastic (Vectra®)
Housing material	Stainless steel 1.4305
Thread dimension	M32
Ambient temperature	-25 - 230°C

Other features

Ambient temperature	-25 - 230°C
---------------------	-------------


Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	202 inductive sensors (high temperature)
packaging dimensions	105 x 43 x 43 mm
gross weight	210 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

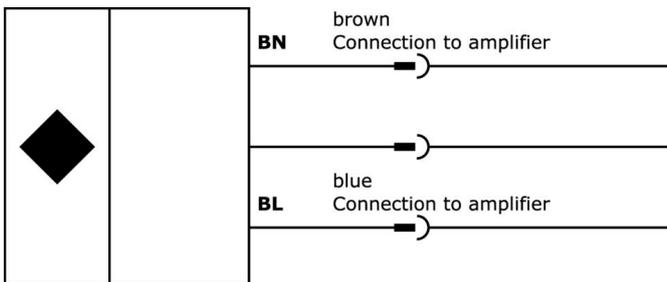

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

