



Magnetic Sensor

Series E22

Description MEK-E22PS/HP2-KL0,3S8

Article number 6370281184

Wiring diagram

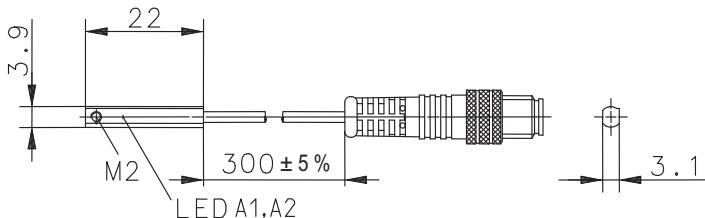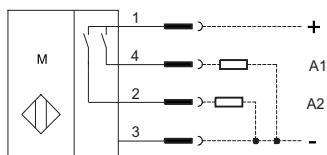

Identifying characteristics in accordance with EN 60947-5-2

Electrical data	
Magnetic sensitivity	± 1,5 mT ... ± 13,5 mT
Switching element function	DC, N.O., open collector, 2 switching points programmable
Repeat accuracy	R ≤ 0,1 mT (constant U _B and ambient air temperature)
Differential travel (hysteresis)	H 1 mT ≤ H ≤ 1,35 mT
Operational voltage range	U _B 10 - 30 VDC
Rated insulation voltage	U _i 75 VDC
Voltage drop	U _d < 2 V @ 50 mA
Utilization category	DC-12
Rated operational current	I _e ≤ 50 mA (1 output activated) ≤ 25 mA per output (both outputs activated)
Leakage current	< 25 µA
No-load supply current	I _o < 10 mA (not activated)
Rated conditional short-circuit current	100 A
Switching element	Hall
Short-circuit protection	pulsed
Mounting	from side or top into a C-Groove
False polarity protection	yes

Electromagnetic compatibility (EMC)

Electromagnetic field test	IEC 61000-4-3
Electrostatic discharge test	IEC 61000-4-2
Electrical fast transient immunity test (Burst)	IEC 61000-4-4
Conducted disturbances, induced by high frequency electromagnetic fields	IEC 61000-4-6
Radiated disturbance field strength	EN 55011



Mechanical data		
Enclosure		PA 12, topaz
Ambient air temperature		-20 °C ... +80 °C (cable fixed mounted)
Type of protection		IP 67 acc. to IEC 529, EN 60529 (only in fully locked position with it's plugs)
Function indication	Output A1	LED orange, output indication / output activated
	Output A2	LED yellow, output indication / output activated
Termination type		Cable 0,3 m ±5 %, PUR - Outer jacket, with plug connector M8
Attachment		1 x setscrew M2 x 3, DIN 913 1 x allen wrench 1 x magnetic programming tool

EU Conformity
acc. to directive 2004/108/EC