

DualSpin Combination air cleaners (2-stage)

Dimensions and part numbers

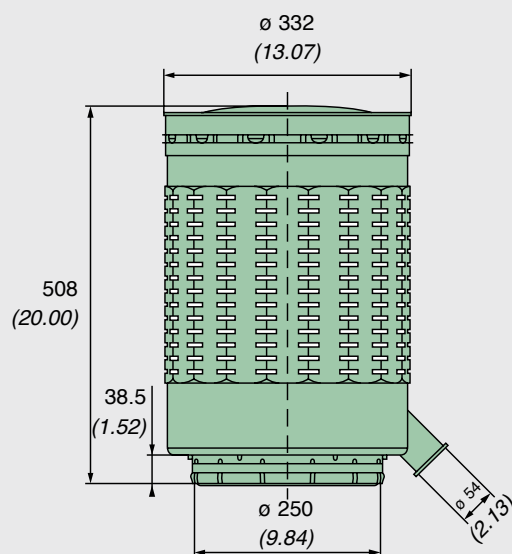


Fig. 1 (scavenging)

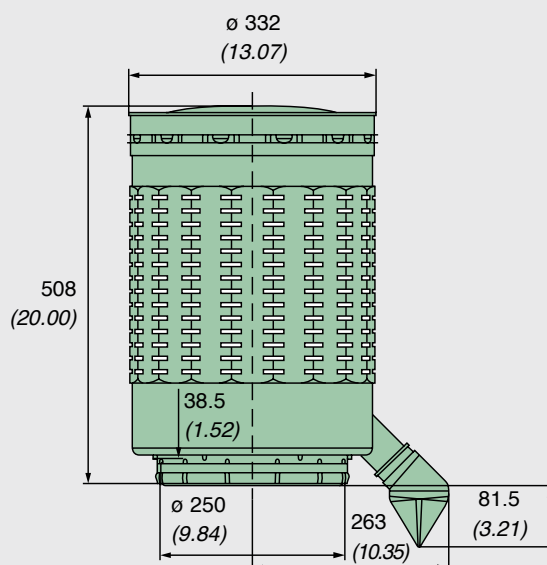


Fig. 2 (with dust discharge valve 39 000 40 671)

NLG Pico to be used with DualSpin

Filter size	Part No. with secondary element	Connection dimension in mm (inch) (see page 57)	Replacement filter element	
			MANN-FILTER main element	MANN-FILTER secondary element
NLG 37-37	44 930 85 953*	250 (9.84)	C 30 1530	CF 1830
NLG 37-42	44 930 85 960*	250 (9.84)	C 30 1730	CF 1840
NLG 37-42	44 930 85 974**	250 (9.84)	C 33 2200	CF 1840
NLG 37-42	44 930 85 975**	250 (9.84)	C 33 2200	CF 1840

* Pleat height 48 mm (1.89 inch)

** Pleat height 60 mm (2.36 inch)

DualSpin precleaners

Installation size	Bracket suitable for preseparator (option)	Part No. without dust discharge valve (Fig. 1)	Part No. with dust discharge valve (Fig. 2)	Nominal flow rate [m³/min]	Weight [kg]
DualSpin 25	39 700 40 999	48 025 75 900	48 025 75 910	18 – 25	2.4
DualSpin 37	39 700 40 999	48 037 75 910	48 037 75 920	25 – 50	2.4