

Rittal – The System.

Faster – better – everywhere.

► TopTherm fan-and-filter units – SK 3238.124

Date : Sep 1, 2020

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



TopTherm fan-and-filter units – SK 3238.124

created: 01.09.2020 on www.rittal.com/com-en

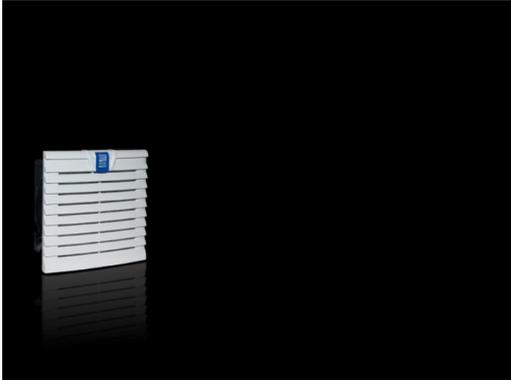

Product description

**Protection category
IP to IEC 60 529:** IP 54
with standard filter and additional fine filter mat: IP 54
with standard filter and hose-proof hood: IP 56

**Protection category
NEMA:** Type 12
with standard filter and additional fine filter mat: Type 12
with standard filter and hose-proof hood: Type 3, 3R, 4, 4X

Supply includes: Complete unit ready to install, including filter mat

Note: With the fan-and-filter unit 3237.XXX, electrical connection is made via two single wires on the unit. For all other fan-and-filter units, a screwless spring terminal is used.

Product features

**Air throughput
(unimpeded air flow):** With DC: 55 m³/h

**Air throughput with
outlet filter including
standard filter mat
(quantity x order
number, output 50/60
Hz):** 1 x 3238200: 43 m³/h
2 x 3238200: 46 m³/h

**Rated operating
voltage:** 24 V (DC)

Dimensions: Width: 148.5 mm
Height: 148.5 mm

**Required mounting
cut-out:** Width: 124 mm
Height: 124 mm

Build depth:	16 mm
Installation depth:	58.5 mm
Temperature range:	Bearing: -30 °C...+70 °C Operation (environment): -15 °C...+55 °C
Power consumption P_{ej}:	With DC: 5.5 W
Rated current max.:	With DC: 0.24 A
Miniature circuit- breaker/fuse:	2 A
Service life:	95500 h
Noise level:	With DC: 46 dB(A)
Diagonal fan:	Axial, DC motor
eCl@ss 8.0/8.1:	27180716
Colour:	RAL 7035
Packs of:	1 pc(s).
Weight/pack:	0.54 kg
EAN:	4028177651722
Customs tariff number:	84145915
ETIM 7.0:	EC000320
ETIM 6.0:	EC000320
eCl@ss 8.0/8.1:	27180716
eCl@ss 6.0/6.1:	27180716
Product description:	SK fan and filter units TopTherm, 55 m ³ /h, 24 V (DC), WHD: 148.5 x 148.5 x 16 mm

Approvals

Approvals:	Approval overview	CCC exception letter CSA
	UL + C-UL - FTTA UR + C-UR	

Certificates: EAC

Declarations: Declaration of conformity
