


NOTICE

THIS DRAWING IS THE PROPERTY OF QUALITROL COMPANY LLC AND IS LOANED ONLY ON THE CONDITION THAT IT WILL BE USED TO FACILITATE THE PURPOSE FOR WHICH INTENDED AND NOT BE REPRODUCED, COPIED OR OTHERWISE DISPOSED OF, AND IS NOT TO BE USED IN WHOLE OR PART FOR FURNISHING INFORMATION RELATIVE TO THE MAKING OF DRAWINGS, PARTS, APPARATUS OR PARTS THEREOF, EXCEPT BY WRITTEN ORDER FROM QUALITROL COMPANY LLC.

MODEL
NO.

900/910 RPRR SERIES

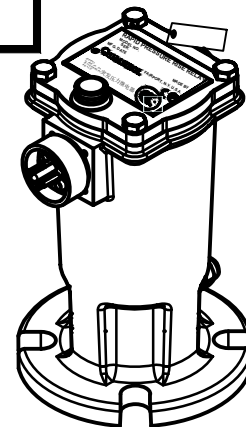


NOTES: UNLESS SPECIFIC OTHERWISE

1. MEETS QUALITROL PRODUCT PERFORMANCE SPECIFICATION PPS-9.
2. FOR OIL(900) OR GAS(910) SPACE INSTALLATION ONLY.
3. CONNECTOR UNITS CONFORMS TO IP65, T-BOX UNITS CONFORM TO IP54.
4. PAINT COLOR: ANSI 70 GRAY EPOXY PAINT(STD) **OR** CORROSION RESISTANT C5M.
5. STANDARD CONNECTORS FOR ANSI, QUALITROL AND MILITARY.
6. ISOLATION TEST: 2000V TO GROUND FOR 60 SECONDS.
7. MOUNTING GASKETS, SPECIAL CONNECTORS CAN BE ADDED SEPARATELY.
8. CABLE LENGTH DIMENSION IS INCHES.

SWITCH RATING


- 15 AMP @ 125, 250, 480 VAC
- .5 AMP @ 125 VDC - NON-INDUCTIVE
- .25 AMP @ 250 VDC - NON-INDUCTIVE

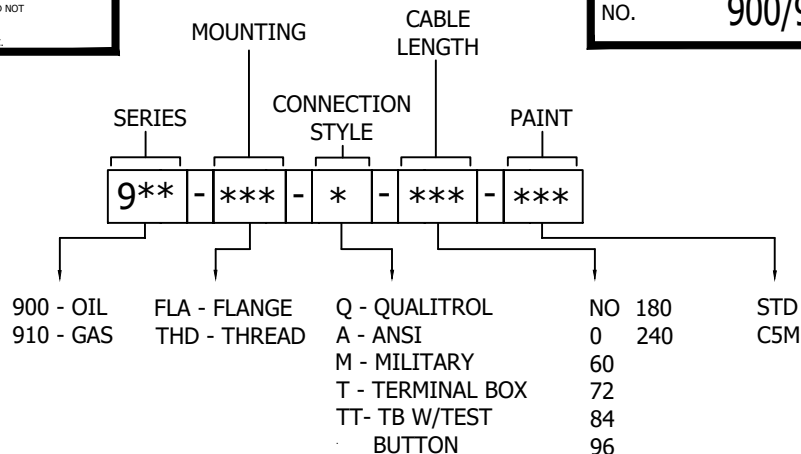

OPTIONAL CONNECTOR

CABLE OPTIONS


- NONE
- 0" (PG16 CABLE GRIP PARTS ONLY)
- 60"
- 96"
- 120"



OPTIONAL, SEE CHART.
16 GA. 3 CONDUCTOR CABLE
UL TYPE SOW-A, CSA TYPE 50
OR PG16 THREAD AND GRIP.
FOR MODELS WITH 0.00 IN
CABLE


DEVICE WIRING

QUALITROL




QUALITROL
(3Q. 7)

ANSI




ANSI
(3A01)

MILITARY




MILITARY
(3M04)

TERMINAL BOX




TERMINAL BOX
(4J02)





THREAD MOUNT

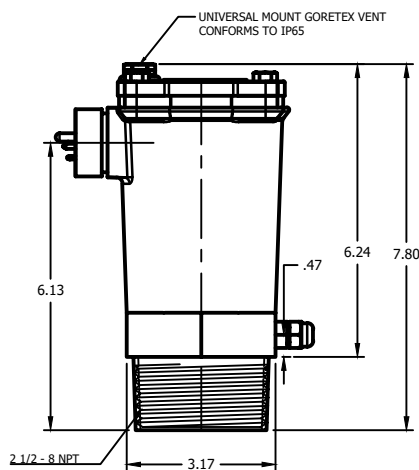

FLANGE MOUNT

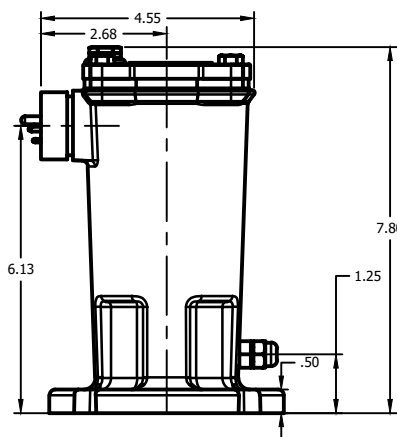

TERMINAL BOX WITH FLANGE

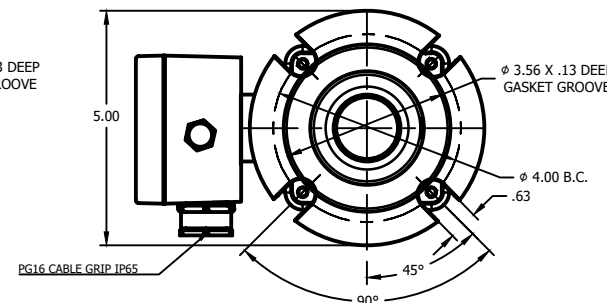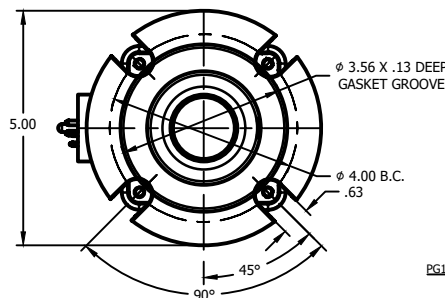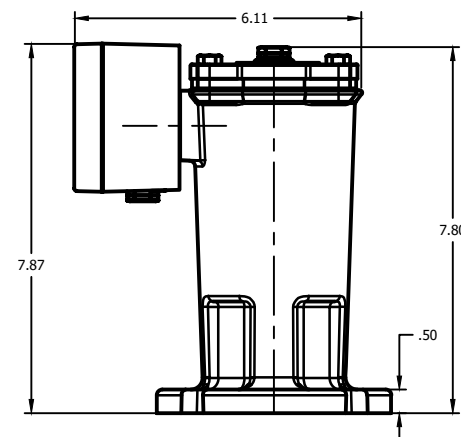

QUALITROL.

DIMENSIONS AND TOLERANCES IN
ACCORDANCE WITH ASME Y14.5M-1994

PH. (585) 586-1515
FAX (585) 377-0220

1385 FAIRPORT ROAD
FAIRPORT, NY 14450

FORM 0-473 REV. F 04/06/06

TITLE: RAPID PRESSURE RISE RELAY
OIL AND GAS USE

MODEL
NO.

900/910 RPRR SERIES

-	5/12/20	RELEASED	39944
LET	DATE	ALTERATION	C.N.