


**"C22SD" SERIES FANS**

Description: **Axial fan a.c. 218X218X83mm**

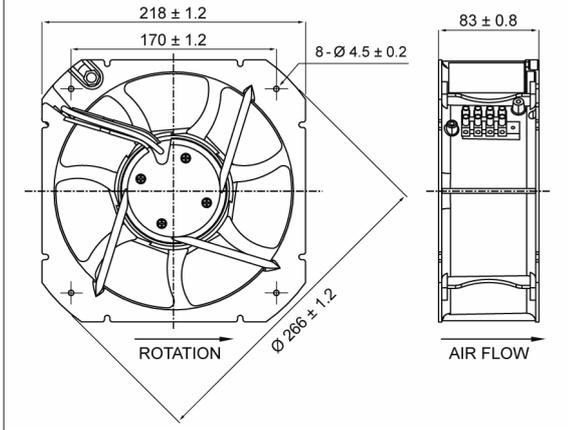

**Fan material:**

casing of aluminium alloy die casting and fibre reinforced plastic (PA 6/6) impeller

**Casing material:**

aluminium UNI5076

**Fixing system:**

No 4 holes Ø4.5

**Motor protection:**

thermally

**Rated temperature range:**

from -25°C to +70°C

**Motor Lifetime L10 at 25°C (approx.):**

63,000 h

**Working class of capacitor:**

class A (only for 230 Vac model)

**Electrical connection:**



by terminal block 3 pins (L-N-PE)

**Weight:**

1,910 kg

**Category:**

external rotor fan (230 Vac model is capacitor run)

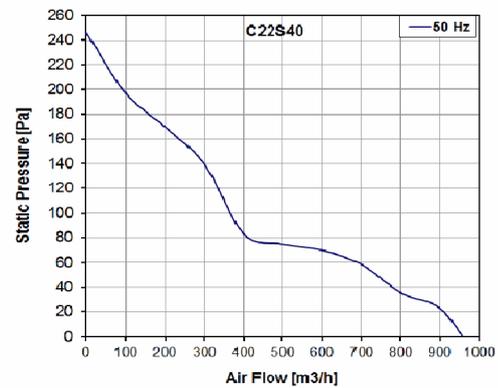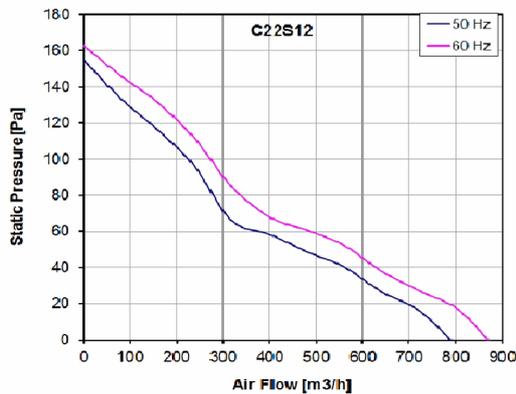

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
C22S12HKBD00	Ball	115 V a.c.	50/60	0.59/0.66	65/76	790/875	155/163	64.6/67.4	2,162/2,314	CE
C22S40HKBD00	Ball	400 V a.c.	50/60	0.240	166	970	245	69.8/72.7	2,620	CE

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.