




Accessories
Connector System M16

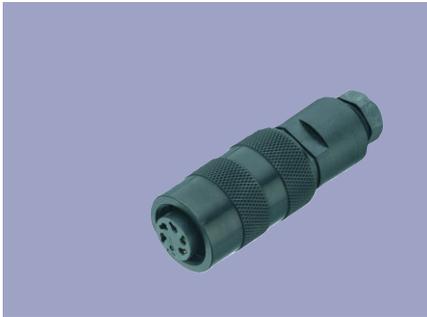


Pin assignment




M16x0.75 Mating female connector
5-pin, straight, with coupling nut,
solder terminal, IP67, not shielded

Connector housing	Plastic PA -40 °C... +95 °C
For wire gauge	4...6 mm, max. 0.75 mm ²

Type EEM 33-70, P/N 005611

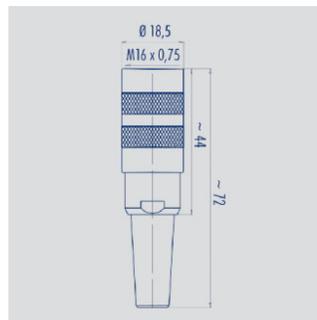


Pin assignment




M16x0.75 Mating female connector
5-pin, straight, with coupling nut,
solder terminal, IP40, shielded

Connector housing	CuZn (Brass, nickel plated) -40 °C... +85 °C
For wire gauge	4...6 mm, max. 0.75 mm ²

Type EEM 33-71, P/N 005612

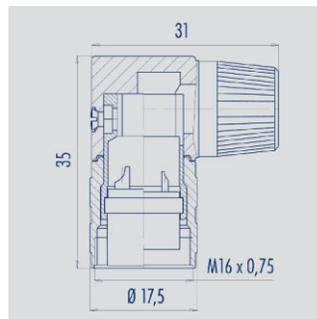


Pin assignment




M16x0.75 Mating female connector
5-pin, angled, with coupling nut,
solder terminal, IP40, not shielded

Connector housing	Plastic PA -40 °C... +85 °C
For wire gauge	6...8 mm, max. 0.75 mm ²

Type EEM 33-72, P/N 005613

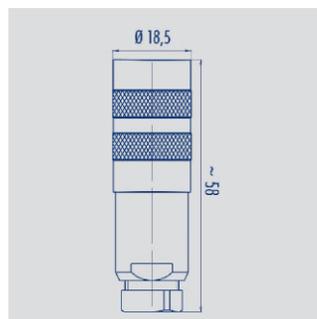

Pin assignment



M16x0.75 Mating female connector
5-pin, straight, with coupling nut,
solder terminal, IP67, shielded

Connector housing	CuZn (Brass, nickel plated) -40 °C... +95 °C
For wire gauge	4...6 mm, PG7 max. 0.75 mm ²

Type EEM 33-76, P/N 005614