

Type: **P1–25/I2/SVB/HI11**
 Article No.: **207297**
 Sales text **I2/SVB main switch**



Ordering information

		BME–CAT Fotos
Produktgruppen–Bezeichnung		T rotary switches, P switch–disconnectors, technical data
		Load current switches
		Main switches with auxiliary contacts and maintenance switches
Design		Surface mounting
Basic type for ... insert mounting form		P1–25/...
Mounting form		I2/SVB/HI11
No. of poles	M	3
Description		As Emergency–Stop device

General


Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL switch disconnector according to IEC/EN 60947–3
Lifespan, mechanical	Operations	× 10 ⁶	0,3
Maximum operating frequency	Operations/h		50

Climatic proofing			Damp heat, constant, to IEC 60068–2–78; Damp heat, cyclical, to IEC 60068–2–30
Ambient temperature			
Open		°C	–25...50
Enclosed		°C	–25...40
Mounting position			As required
Mechanical shock resistance to IEC 60068–2–27	Half-sinusoidal shock 20 ms	g	> 15
Contacts			
Rated operational voltage	U_e	V AC	690
Rated impulse withstand voltage	U_{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Rated uninterrupted current			
open	I_u	A	25
Enclosed	I_u	A	25
Load rating with intermittent operation, class 12			
AB 25 % DF		$\times I_e$	2
AB 40 % DF		$\times I_e$	1,6
AB 60 % DF		$\times I_e$	1,3
Short-circuit rating			
Fuse		A gG/gL	25
Rated short-time withstand current (1 s current)	I_{cw}	A _{rms}	640
Switching angles		°	90
Current heat loss per contact at I_e		W	1,1
Terminal capacities			
Solid or stranded		mm ²	1 × (1.5 – 6) 2 × (1.5 – 6)
Flexible with ferrule to DIN 46228		mm ²	1 × (1 – 4) 2 × (1 – 4)
Terminal screw			M4
Tightening torque		Nm	1.6
Switching capacity			
AC			
Rated making capacity cos φ = 0.35		A	240
Rated breaking capacity, motor load switch cos φ = 0.35			


230 V		A	190
400 V		A	150
500 V		A	170
690 V		A	150
Rated operational current 440 V load-break switch AC-21A	I_e	A	25
AC-3 motor load switch motor rating			
230 V	P	kW	5,5
400 V	P	kW	7,5
500 V	P	kW	7,5
690 V	P	kW	7,5
AC-23A Motor load switches (main switches maintenance switches)			
230 V	P	kW	7
400 V	P	kW	13
500 V	P	kW	11
690 V	P	kW	11
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I_e	A	25
Voltage per contact pair in series		V	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I_e	A	25
Contacts		Quantity	1
48 V			
Rated operational current	I_e	A	25
Contacts		Quantity	2
60 V			
Rated operational current	I_e	A	25
Contacts		Quantity	3
120 V			
Rated operational current	I_e	A	12
Contacts		Quantity	3
Notes			
Notes			

Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft
 The rated uninterrupted current I_u is stated at max. connected cross-section.
 For terminal capacity solid, stranded and flexible:
 Max. 2 cross-section sizes difference admissible when using 2 conductors.


Dimensions

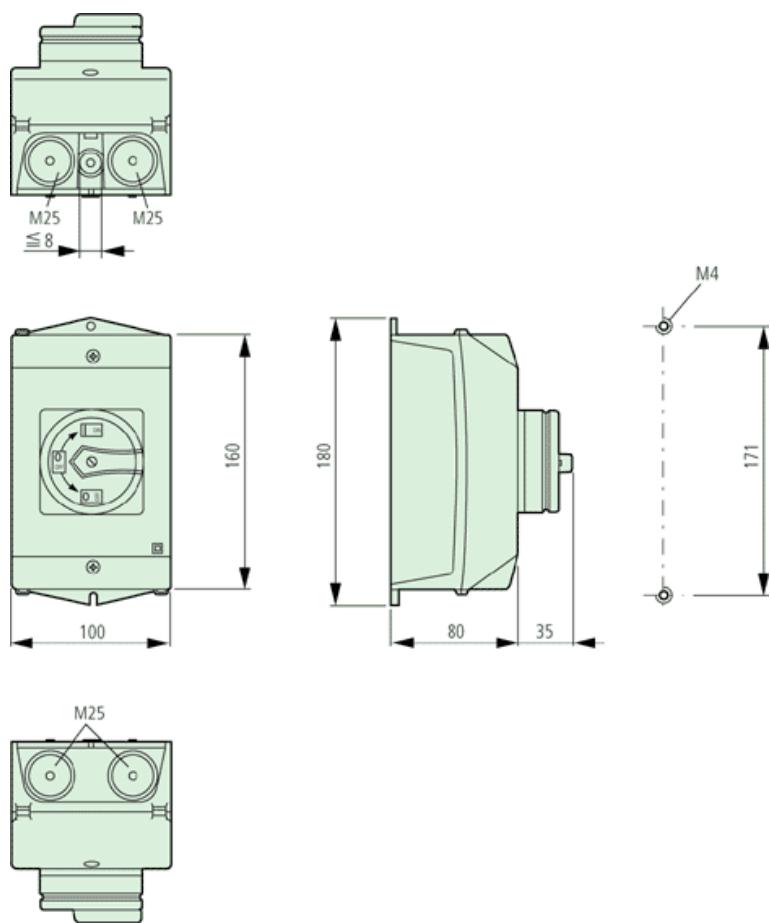

Dimensions

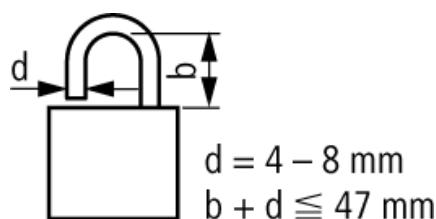

Characteristic curve

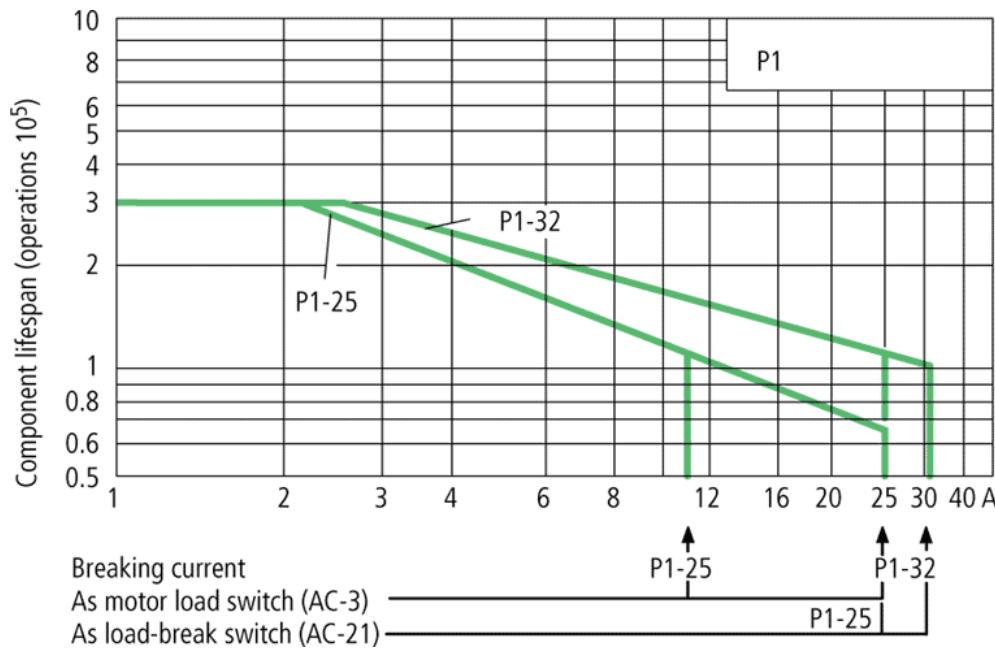

For utilisation category AC-4 (extreme load: 100 % inching, reversing or plugging)

The blocked rotor current of the motor should not exceed the rated current of the switch for AC-21A to ensure a reasonable device lifespan.

Moeller GmbH, Hein-Moeller-Str. 7–11, D-53115 Bonn

E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>

HPL-C2007G V2.1 © 2007 by Moeller GmbH