

SHORT CIRCUITING DEVICE FOR LV CABINET

The earthing works is a mandatory operation in the NFC 18510 (chp 7.1 - Processes log) standard. Tinned copper insulated cable silicone core 16 mm². Authorized employment ERDF equipment.

Composition A: for connection.

Composition B: for network.

Composition C: for connection and network.
Maximum Icc: 4kA/1s

IEC 61230 



Reference	Composition
MC-296-A	4 multi-strand copper cables 16mm ² MC-296-440 + 1 micro clamps MC-296-P* + 1 connecting blade M-95627/4* + 1 round cartridge M-95626/4* + 1 cartridge size 00 MC-296-00/08* + 1 open end spanners 13/14/16/17 MO-687-D + 1 handle MC-296-M + 1 Case with foam and notice M-91209
MC-296-B	4 multi-strand copper cables 16mm ² MC-296-440 + 5 multi-strand copper cables 16mm ² M-952656 + 1 micro clamps MC-296-P* + 1 cartridge size 115 MC-296-115/08* + 1 cartridge size 160 MC-296-160/08* + 1 threaded adapters MC-181* + 1 pipe wrench 10x17mm M-882462 + 1 open end spanners 13/14/16/17 MO-687-D + 1 handle MC-296-M + 1 case with foam and notice M-91209
MC-296-C	4 multi-strand copper cables 16mm ² MC-296-560 + 5 multi-strand copper cables 16mm ² M-952656 + 5 micro clamps + 1 connecting blade M-95627/4* + 1 round cartridge M-95626/4* + 1 cartridge size 00 MC-296-00/08* + 1 cartridge size 115 MC-296-115/08* + 1 cartridge size 160 MC-296-160/08* + 1 threaded adapters MC-181* + 1 pipe wrench 10x17mm M-882462 + 1 open end spanners 13/14/16/17 MO-687-D + 1 handle MC-296-M + 1 case with foam and notice M-91209

* Sold in packs of 4.
Other composition on request.



MC-296-M



M-95626/4



M-95627/4




MC-296-P



Intervention :
On LV Cabinets.

1

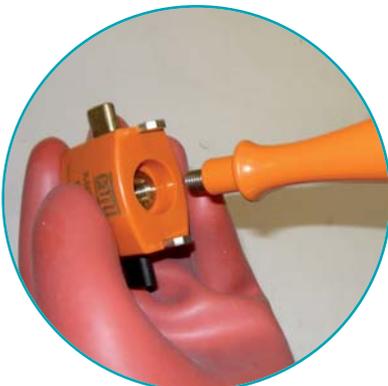

2



3



SHORT CIRCUITING DEVICE FOR LV INDUSTRIES CABINET

Icc : 4 kA/1s

IEC 61230 

The earthing works is a mandatory operation in the NFC 18510 (- Processes log chp 7.1) standard.

Multi strand isolated copper silicon cable 16 mm².

Reference	Composition
MC-296-NFC	5 multi-strand copper cables 16mm ² M-952650 + 5 micro clamps + 1 Case and notice M-76768



Threaded adapter

Smooth threaded terminals for positioning shunts (live working tools) or earthing equipment and short circuit cabinets terminals LV.

Reference	Description	Composition	
MC-184-6F	Smooth threaded terminal M6	Set of 4 adapters by reference, delivered in a vinyl bag	0.12
MC-182	Smooth threaded terminal M8	Set of 4 adapters by reference, delivered in a vinyl bag	0.15
MC-185-10F	Smooth threaded terminal M10	Set of 4 adapters by reference, delivered in a vinyl bag	0.20
MC-183	Smooth threaded terminal M12	Set of 4 adapters by reference, delivered in a vinyl bag	0.25



Reference	Description	Composition	
MC-184-6M	Smooth threaded terminal M6	Set of 4 adapters by reference, delivered in a vinyl bag	0.12
MC-182-8M	Smooth threaded terminal M8	Set of 4 adapters by reference, delivered in a vinyl bag	0.15
MC-185-10M	Smooth threaded terminal M10	Set of 4 adapters by reference, delivered in a vinyl bag	0.20
MC-181	Smooth threaded terminal M12	Set of 4 adapters by reference, delivered in a vinyl bag	0.25

